



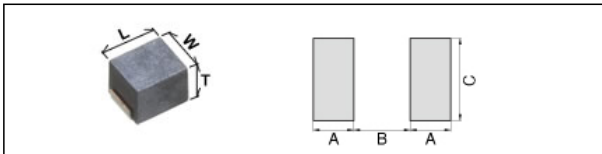


# NLCV32T-220K-PF

用途	 一般等级
工法和特点	 绕组
	 无方向性
	 铁氧体磁芯
系列	NLCV-PF系列 / NLCV32-PF型
状态	量产体制



尺寸	
长度(L)	3.20mm +/-0.20mm
宽度(W)	2.50mm +/-0.20mm
厚度(T)	2.20mm +/-0.20mm
推荐焊盘布局(A)	1.20mm Nom.
推荐焊盘布局(B)	2.00mm Nom.
推荐焊盘布局(C)	2.00mm Nom.


电气特性	
电感	22uH +/-10% at 2.52MHz
额定电流	300mA
自己共振频率 [Min.]	21MHz
Q [Typ.]	15 at 2.52MHz
直流电阻 [Nom.]	770m
直流电阻 [Max.]	1.001

其他	
使用温度范围(包括自我温度上升)	-40 to 105degC
焊接方法	流体, 回流, 烙铁焊接
AEC Q200	No
包装形式	塑封编带 (180mm卷筒)
包装个数	2000Pcs Min.
重量	0.05g


•This PDF document was created based on the data listed on the TDK Corporation website.  
•All specifications are subject to change without notice.

# NLCV32T-220K-PF


特性图表 (这是参考数据, 并不保证产品的特性。)

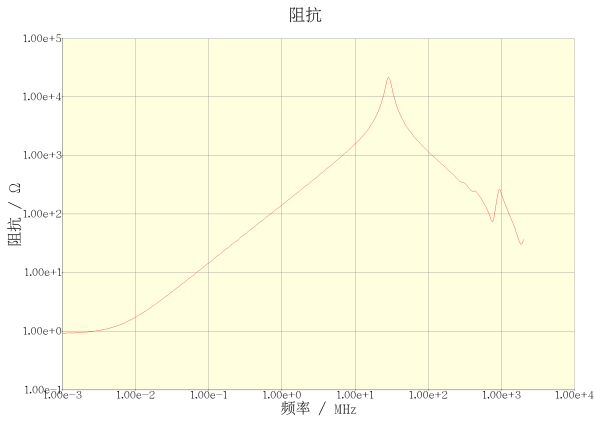


NLCV32T-220K-PF

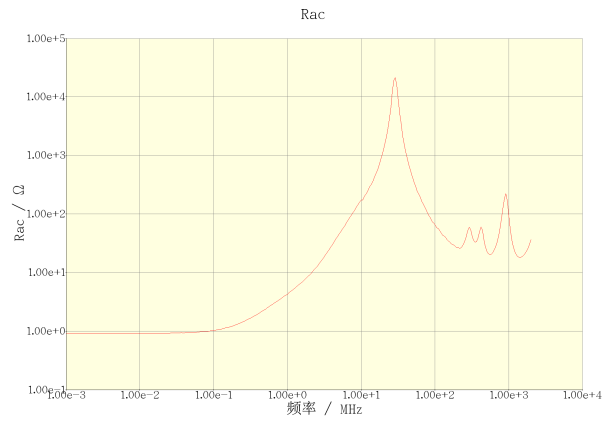

NLCV32T-220K-PF

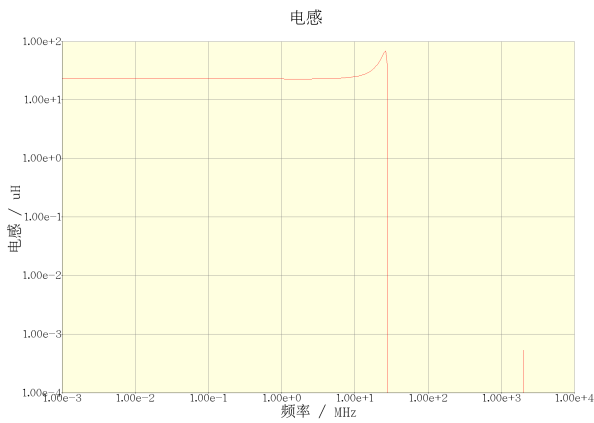

NLCV32T-220K-PF

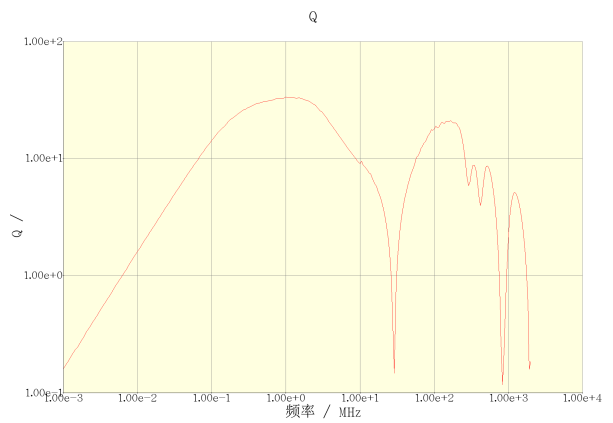


NLCV32T-220K-PF


•This PDF document was created based on the data listed on the TDK Corporation website.  
•All specifications are subject to change without notice.

NLCV32T-220K-PF

特性图表 (这是参考数据, 并不保证产品的特性。)

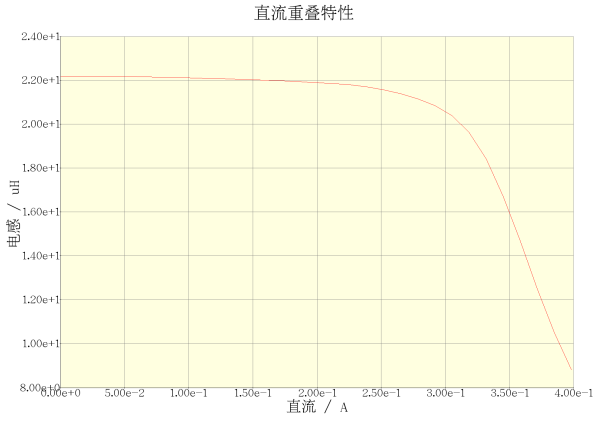


NLCV32T-220K-PF(Amb. Temp. = 20degc)

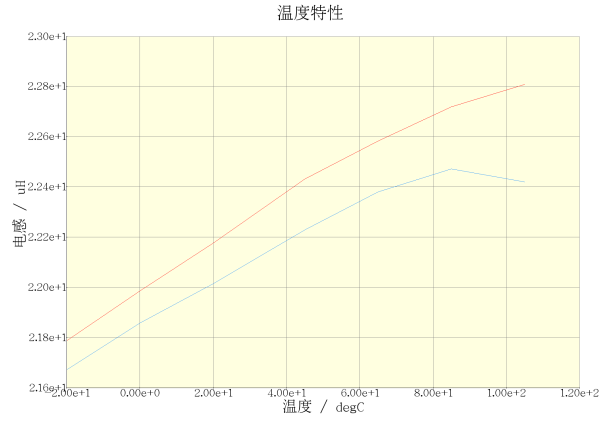

NLCV32T-220K-PF(DC = 0A)

NLCV32T-220K-PF(DC = 0.15A)

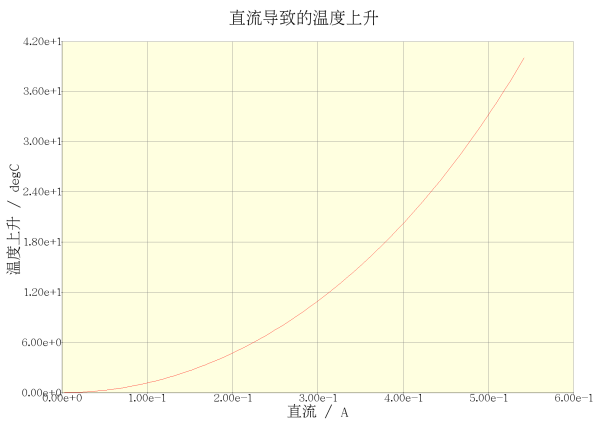

NLCV32T-220K-PF(Amb. Temp. = 20degc)

•This PDF document was created based on the data listed on the TDK Corporation website.  
•All specifications are subject to change without notice.