


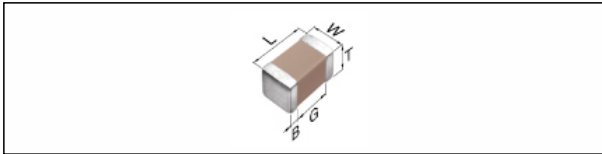


C3225C0G2A223J160AA

(交货型号: C3225C0G2A223JT\*\*\*\*)

用途	 一般等级  车载用途时为 CGA6L2C0G2A223J160AA。
特点	 Mid 中耐压(100 to 630V)
系列	C3225 [EIA CC1210]



尺寸	
长度(L)	3.20mm +/-0.40mm
宽度(W)	2.50mm +/-0.30mm
厚度(T)	1.60mm +/-0.20mm
端子宽度(B)	0.20mm Min.
端子间隔(G)	


电气特性	
电容	22nF +/-5%
额定电压	100Vdc
温度特性	C0G(0+/-30ppm/degC)
Q	1000 Min.
绝缘电阻	10000M Min.

其他	
焊接方法	回流
AEC Q200	No
包装形式	塑封编带 (180mm卷筒)
包装个数	2000 Pcs Min.


•本PDF文件根据TDK株式会社网站刊登的数据制作。  
•所有规格都可能不经预告而更改。

# C3225C0G2A223J160AA


特性图表 (这是参考数据, 并不保证产品的特性。)

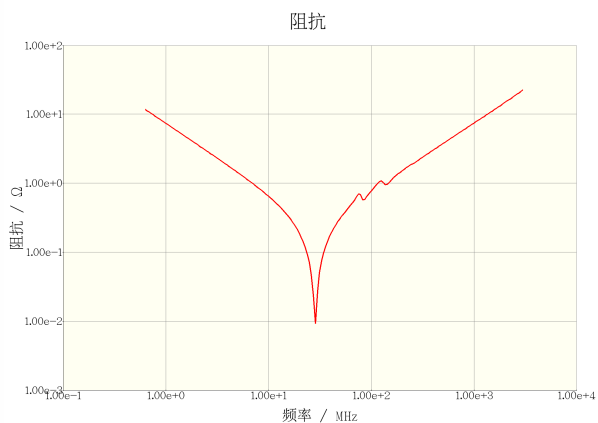


C3225C0G2A223J160AA

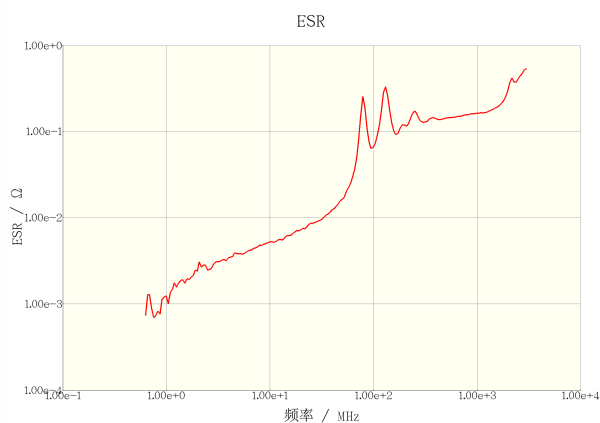

C3225C0G2A223J160AA

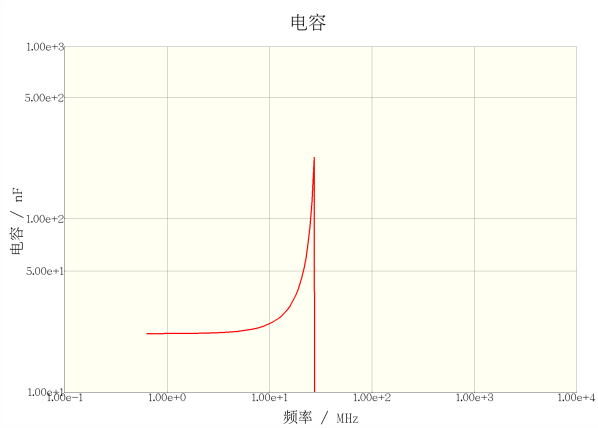

C3225C0G2A223J160AA

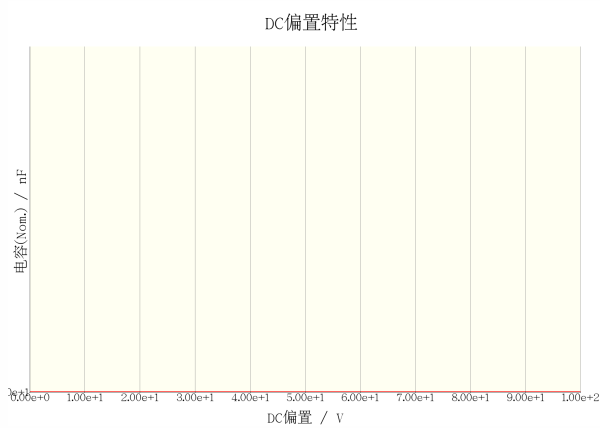

C3225C0G2A223J160AA



C3225C0G2A223J160AA (DC Bias = 0V)    C3225C0G2A223J160AA (DC Bias = 50V)



•本PDF文件根据TDK株式会社网站刊登的数据制作。  
 •所有规格都可能不经预告而更改。